produced & distributed by Fortuny S.r.l. San Marco, 2425 . 30124 Venezia - Italy p+39 041 5236953 . info@fortuny.it www.fortuny.it CESENDELLO / art. G 019 CE-1 / glass assembly instructions / suspended 1 x MAX 5W | E14 | 220-240V | 50-60 Hz ϵ ATTENTION: do not use abrasive products to clean this lamp but only a damp cloth. Our creations may show slight imperfections due to the special handwork required on each piece. IMPORTANT: keep for any possible need

Variations are one of the features which make each of our products an original and unique item.

• ATELIER

GENERAL:

- Read all instructions and review diagrams beginning with the installation of the fixture.
- All electrical connections must be in accordance with local codes, ordinances or national codes. If you are unfamiliar with methods of electrical wiring, secure the services of a qualified licensed electrician.

BEFORE BEGINNING INSTALLATION:


- Turn off the electricity to the outlet box at the circuit breaker or fuse box.
- If you are replacing an existing fixture, remove the old fixture and expose the supply wiring.
- Remove the old cross bar.

ELECTRICAL CONNECTIONS:


- Connect the blue wire from the fixture to the blue wire of the supply circuit.
- Connect the brown wire from the fixture to the brown supply wire. Connect the ground wire - yellow/green to the ground conductor of the supply circuit.
 Make sure that there are no loose strands of wire and that there are no loose connections.

INSTALLING FIXTURE:


- 1. Before starting the installation, disconnect the power.
- 2. Fix element **A** to the cealing with suitable screws.




- Make the electrical connections.
 Refer to the section titled Electrical Connections.
- 4. Place the canopy (element **B**) over the nipple.





5. Screw the hook **C** onto the nipple and tighten securely.




- 6. Install bulb. Do not exceed the maximum wattage for this fixture.
 - Refer to the wattage warning label attached to the fixture for maximum allowable wattage.
- 7. You can now hang your lampshade.
- 8. Restore the electricity and test.








B. Insert the lampshade through the cords as shown in the picture.



Α

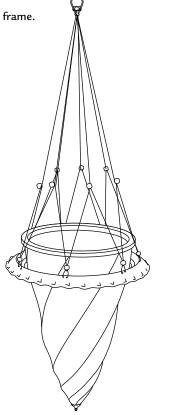

D. Please note: if the length of the cords is minimal you will find the chains dropped from the frame (as shown in the pictures).

